


Multifunction Devices CIM2, CIM22, CIM23

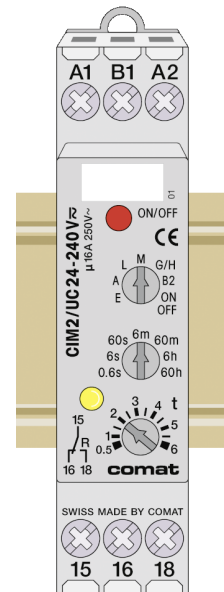

1 Features

- Power supply AC and DC 24 ... 240 V, 16 ... 63 Hz
- 1 Change-over contact 16 A or Semiconductor output 1.2 A AC or 4 A DC
- 7 timer functions: E, A, L, M, G, H, B2
- 7 time ranges from 50 ms to 60 h
- Service function ON/OFF with push button
- LED output status display
- Railway versions available
- Relay contact in AC-mode: commutation at zero crossing (50/60 Hz)

2 General description

The CIM2, CIM22, CIM23 are compact and multifunctional timer relays with 7 functions and 7 time ranges from 50 ms to 60 hours. They are developed for a voltage range of UC 24-240V and are able to switch nominal current up to 16 A at a nominal voltage of 240 V. Solid-state outputs for 1.2 A, 250 V AC (CIM22) and 4 A, 24 V DC (CIM23) are available.

The CIM2 complies with the applicable DIN standards 43880 at an installation dimension of 17.5 mm.

Due to its wide range of application, the product reduces the inventory requirement of various different types.

Technical specification is subject to change without previous notice




3 Order designation

Comat Multifunction Device

CIM2/UC24-240V	(Relay Output)
CIM2R/UC24-240V	(Relay Output, Railway)
CIM22/UC24-240V	(Solid-State AC Output)
CIM22R/UC24-240V	(Solid-State AC Output, Railway)
CIM23/UC24-240V	(Solid-State DC Output)
CIM23R/UC-24-240V	(Solid-State DC Output, Railway)


4 Connection diagram

Input - Function:




Output - Type:


CIM2, CIM2R



CIM22, CIM22R





CIM23, CIM23R





5 Function descriptions

5.1 On delayed (E)

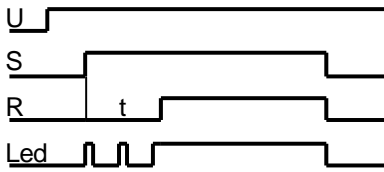

By triggering (S) \uparrow , the output R is switched ON according to the set time t.



5.2 Blinker (B₂), interval start

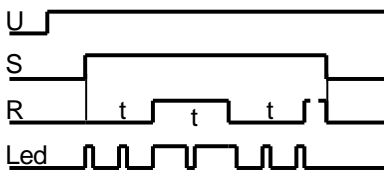

By triggering (S) \uparrow , the output R is switched OFF/ON according to the set time t. The output will be stopped at the same time as (S).



5.3 Delayed pulse (G/H)

5.3.1 On delay single shot (G), set-up: G/H

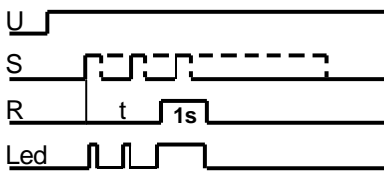



By triggering (S) \uparrow , the output R is switched on for a fixed pulse length of one second after expiry of set time t. The output impulse is independent of the duration of the trigger.

5.3.2 On delay single shot (H), set-up: G/H

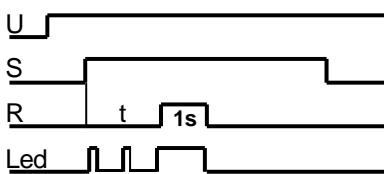



By triggering (S) \uparrow , the output R is switched on for a fixed pulse length of one second after expiry of set time t. The output impulse stops with the falling edge (S) \downarrow .

5.4 Off delay (A)

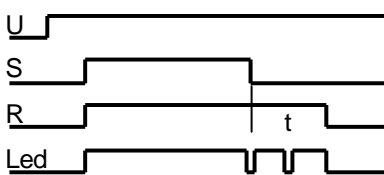



By triggering (S) \uparrow , the output R is switched ON. With falling edge (S) the output R is switched OFF after the set time t.

5.5 Pulse shaping (L), able to retrigger

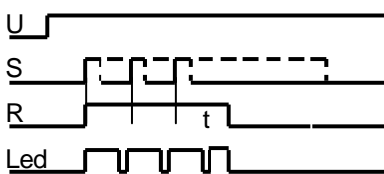


By triggering (S) \uparrow , the output R is switched ON for the set time t. If, during the timing, a new rising edge (S) \uparrow occurs, the time t is reset. The output impulse is independent of the duration of the trigger.

5.6 Pulse shaping (M)

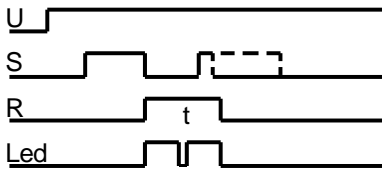

By triggering (S)↓, the output R is switched ON for the set time t.
During the timing, (S)↓ has no more influence on R.

5.7 Service function (ON/OFF)

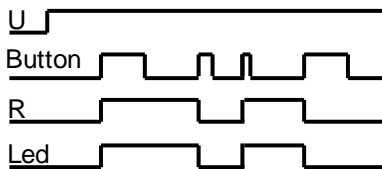

Relay ON/OFF, independent of the trigger B1. Eventually working time functions are interrupted. By pushing the button, the relay is switched ON or OFF.

6 Specifications

6.1 General Data

6.1.1 Mechanical Data

Outside dimension	System DIN, W x H x D: 17.5 x 75 x 64 mm
Connector	Screw terminal 2.5 mm ²
Max. screw tightening torque	0.4 Nm
Protection	IP20
Case material	Lexan EXL9330
Weight	approx. 70 g
Fastening	TS35 DIN/EN 60715 or screw fastening M4

6.1.2 Ambient conditions

Storage temperature	-40 °C ... +85 °C
Operating temperature	-40 °C ... +60 °C (Railway: -40 °C ... +70 °C)
Relative humidity	10 % ... + 95 % (not condensed)

6.1.3 Life cycle

Life cycle	> 100 000 h (at 25 °C)
(Relay contacts: see Point 6.4 Output circuit)	

6.2 Electrical Data

6.2.1 Supply U_B (A1 – A2)

Nominal operating voltage (AC/DC)	24 ... 240 V
Operating voltage (AC/DC)	16.8 ... 250 V
Frequency range	16 ... 63 Hz
Power consumption	≤ 23 mA
Inrush current	≤ 2.5 A, τ = 100 μs
Power consumption	AC: ≤ 1.2 VA; DC: ≤ 430 mW

6.2.2 Input control, U_S (B1)

Control voltage range (AC/DC)	16.8 ... 250 V
Response level (AC/DC)	13 V / 15 V
Power consumption	≤ 22 mA
Cut off current (DC)	≤ 0.5 mA
Glow lamp current (AC)	< 10 mA
Hysteresis	approx. 1 V

6.3 Time response

6.3.1 Time ranges

The time ranges should be adjusted by the tuning button in the ratio 0.5 ...6.

Time ranges	50 ms ... 0.6 s
	0.5 s ... 6 s
	5 s ... 60 s
	0.5 min ... 6 min
	5 min ... 60 min
	0.5 h ... 6 h
	5 h ... 60 h

Time range tolerance	t min	-5% ... +0%
	t max	-0% ... +5%

6.3.2 Time constraint

Voltage stability	≤ 1% over the whole range
Temperature stability	≤ 2% over the whole range
Maximal variation under interferences described in chapter 9.	≤ 5%

6.3.3 Other time data


Supply trigger time (Start-up time)	≤ 45 ms
Min. trigger time (AC/DC)	≥ 20 ms
Reset time control input (AC/DC)	≤ 40 ms
Reset time power supply (AC/DC)	≤ 45 ms
Power supply protection 50/60 Hz	≥ 20 ms
Response delay (B1)	≤ 30 ms
Repetition accuracy	± 0.1%
or	DC: 2 ms AC: ± 10 ms

6.4 Output circuit


	Relay	Solid-state AC	Solid-state DC
Type	CIM2 / CIM2R	CIM22 / CIM22R	CIM23 / CIM23R
Output	C.O.	N.O.	N.O.
	(For AC: commutation at zero crossing)		
Nominal current at 40 °C	16 A	2 A	5 A
Nominal current at 60 °C	13 A	1.2 A	4 A
Inrush current	30 A / 10 ms	100 A / 10 ms	40 A / 10 μs
Nominal voltage	250 V	250 V AC	250 V DC
Switching power AC	4000 VA AC-1	300 VA AC-1	-
Switching power DC	384 W DC-1	-	96 W DC-1
Contact material	AgNi 90/10	Triac	MOSFET
Recommended minimal load	10 mA	50 mA	1 mA
Leakage current	-	1 mA	10 μA
Voltage drop	-	1.1 V	300 mV
I ² t	-	78 A ² s	-
Short-circuit strength	-	no	no
Life time of contacts	> 50 x 10 ³	∞	∞
Mechanical life time	> 30 x 10 ⁶	-	-
Voltage stability			
Input – Contact		2.5 kV (RMS, 1 min.)	

6.5 Typical performance characteristics


CIM2, CIM2R - Breaking capacity

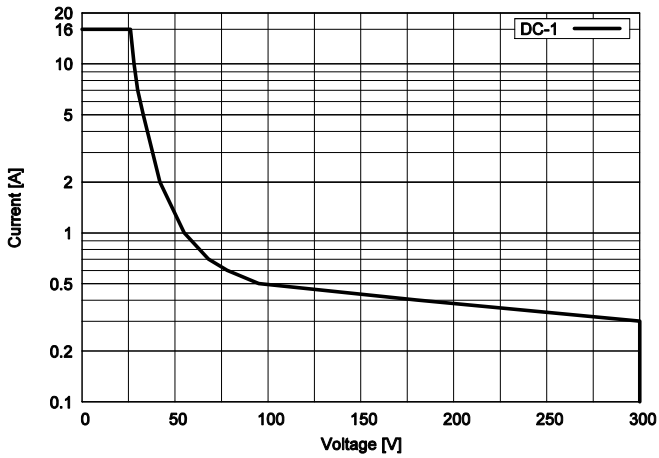


CIM2, CIM2R - Electrical endurance

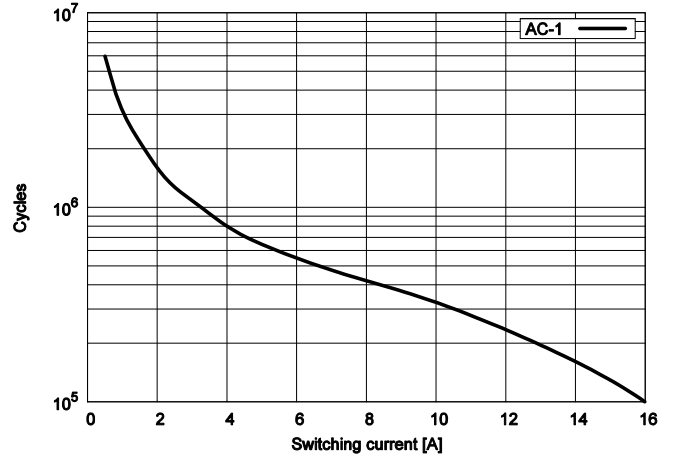


CIM2, CIM2R - Output current

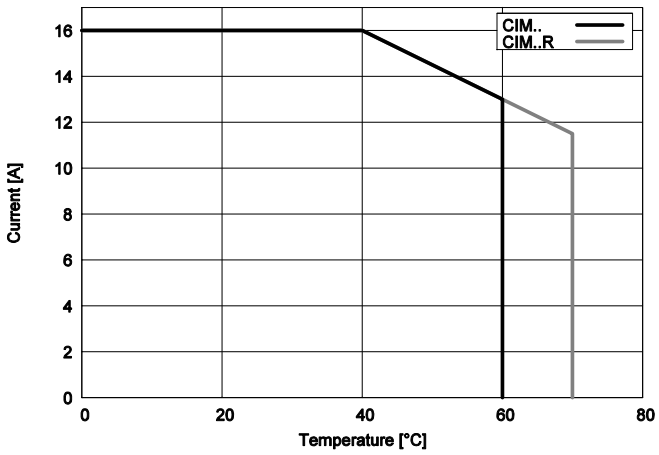


CIM22, CIM22R - Output current

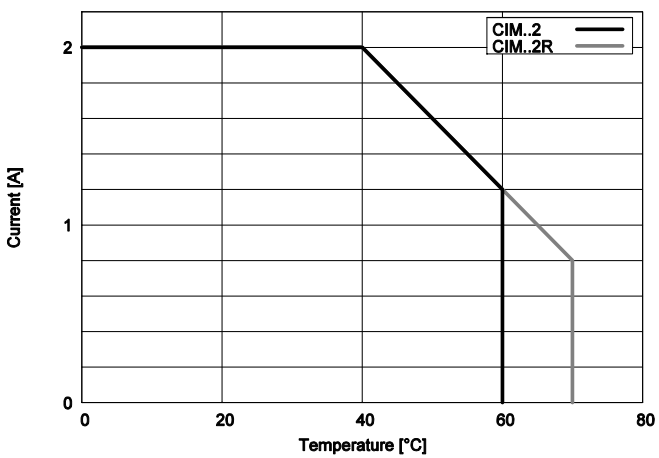

CIM23, CIM23R - Output current

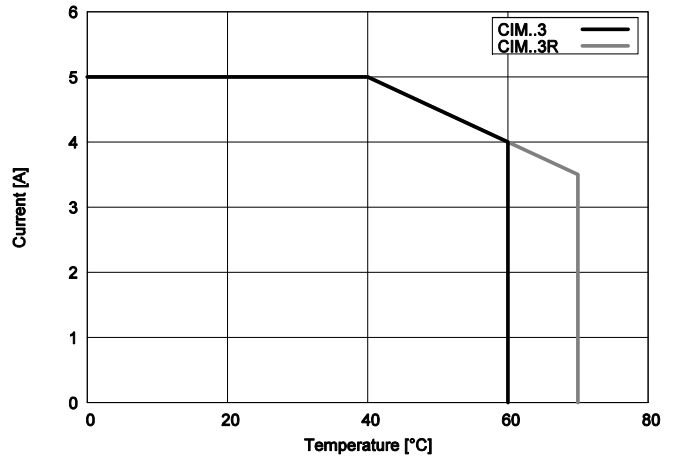

7 Application hints

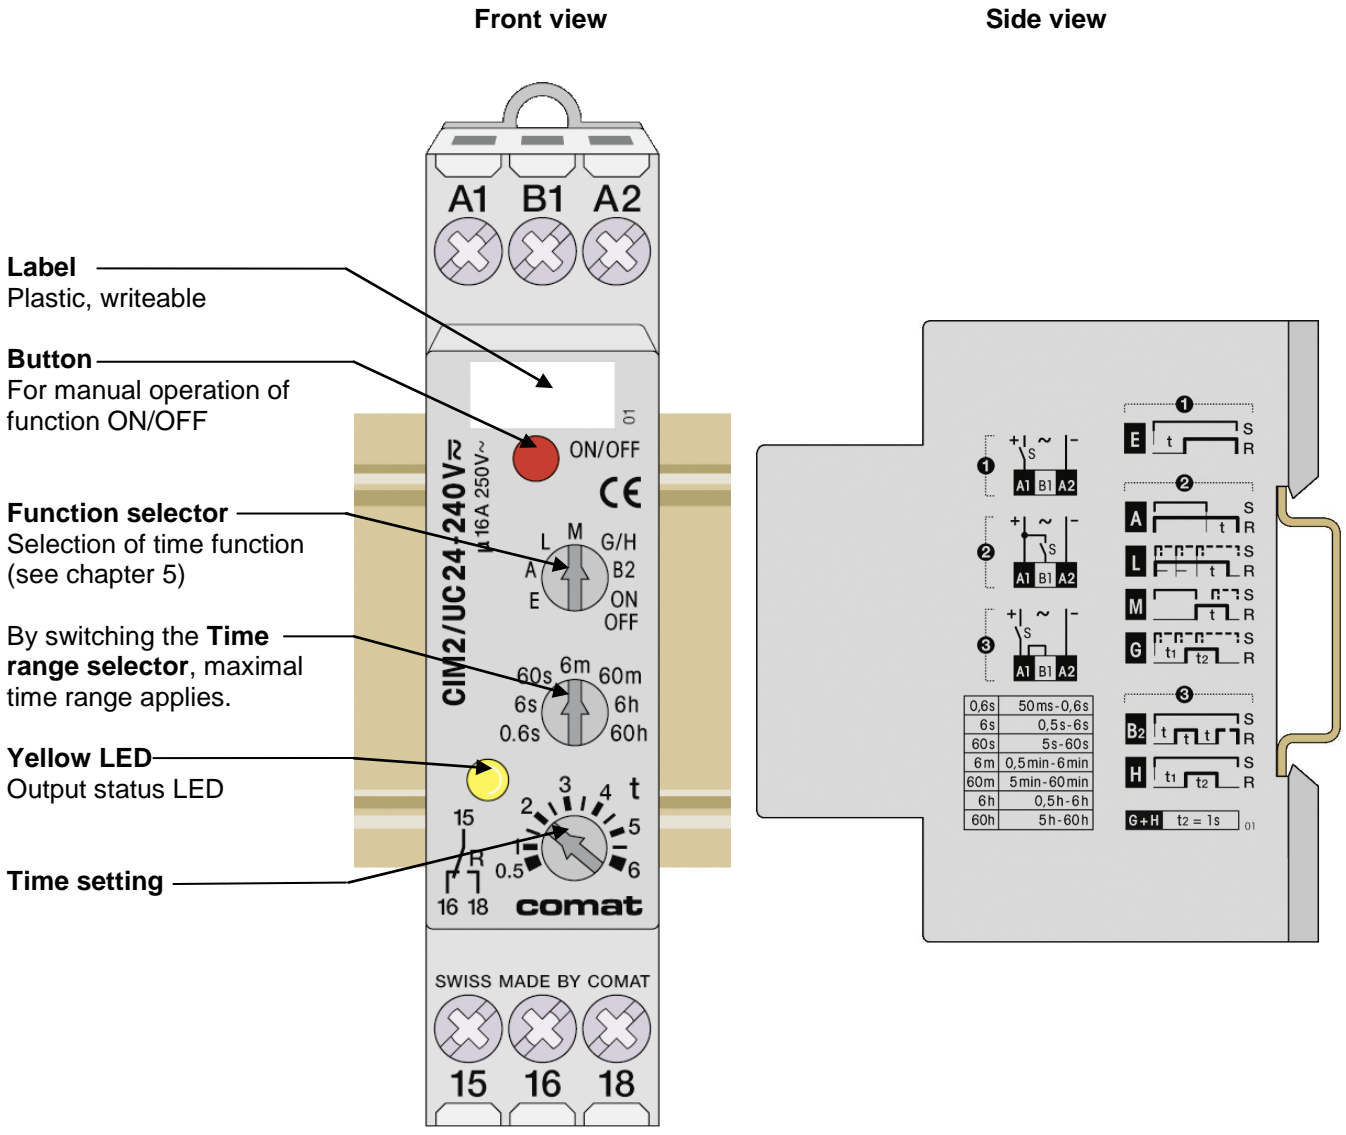


7.1 Switching state display

The state of the output relay and the timer is displayed by the yellow LED. A flashing signalizes a running timer.

LED		Relay	Time expires
Not glowing	_____	Off	No
Glowing constantly	=====	On	No
Flashing short	▬▬▬▬▬▬	Off	Yes
Flashing long	▬▬▬▬▬▬	On	Yes

8 Dimensions

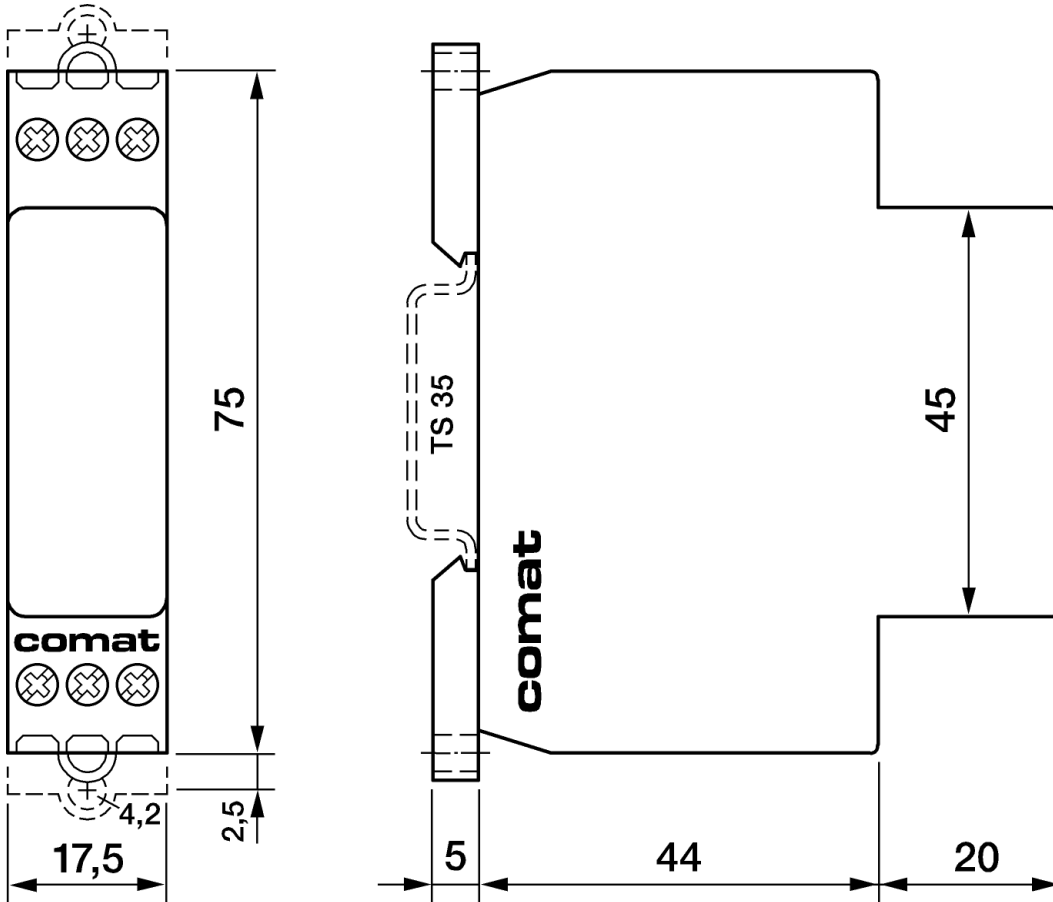

9 Standards

Interference immunity

- EN 61000-6-2:2005
- EN 61000-4-2:2001 Level 3 (Air: 8 kV)
- EN 61000-4-4:2004 Level 3 (2 kV)
- EN 61000-4-5:2006 Level 3 (2 kV)

Interference emission

- EN 61000-6-3:2007
- EN 55022:2006 Class B

Safety

- EN 60730-1:2000
- EN 61812-1:1996+A11:1999
- EN 50155:2007

Conformities, Identification

CE

10 Revision history

Version	Revision date	Responsible	Modifications
25044-02-57-401	03.08.2010	Cp/Sa/Jg	Version 1
25044-02-57-402	29.06.2011	Cp	Small corrections